


Industrial Series

in painted steel
Diesel fuel and kerosene
10 bar

Swivel: Brass
Seals: Viton
Hose: Antistatic black synthetic rubber

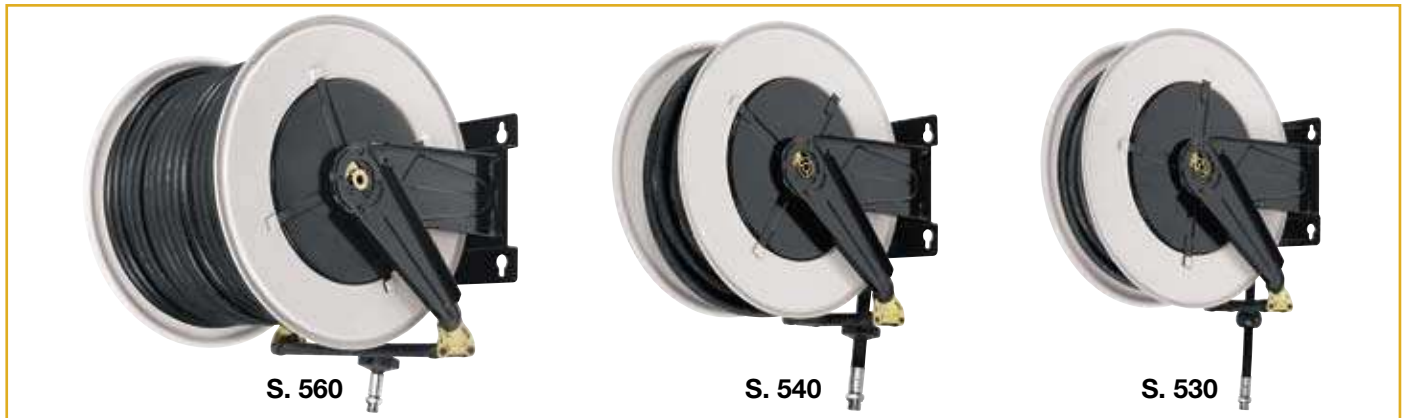

	Dimension	Length (m)	Hose	Flow	Inlet	Outlet	Item
Series 530	Without hose	-	-	50 l/min	F 1/2" G	F 1/2" G	I530/10
	13/20mm	20	rubber	45 l/min	F 1/2" G	M 1/2" G	I530/61
	13/20mm	25	rubber	43 l/min	F 1/2" G	M 1/2" G	I530/62
	Without hose	-	-	100 l/min	F 1" G	F 1" G	I530/60
	19/27mm	12	rubber	87 l/min	F 1" G	M 3/4" G	I530/63
	25/35mm	8	rubber	93 l/min	F 1" G	M 1" G	I530/64
Series 540	Without hose	-	-	100 l/min	F 1" G	F 1" G	I540/10
	19/27mm	15	rubber	85 l/min	F 1" G	M 3/4" G	I540/61
	19/27mm	20	rubber	83 l/min	F 1" G	M 3/4" G	I540/62
	25/35mm	15	rubber	90 l/min	F 1" G	M 1" G	I540/63
	Without hose	-	-	100 l/min	F 1" G	F 1" G	I560/10
Series 560	19/27mm	30	rubber	80 l/min	F 1" G	M 3/4" G	I560/61
	19/27mm	35	rubber	78 l/min	F 1" G	M 3/4" G	I560/62
	19/27mm	40	rubber	76 l/min	F 1" G	M 3/4" G	I560/63
	25/35mm	20	rubber	87 l/min	F 1" G	M 1" G	I560/64
	25/35mm	30	rubber	85 l/min	F 1" G	M 1" G	I560/65



Fixed and swivelling bracket see page 40-41