


Industrial Series

motor operated
Diesel fuel and kerosene
10 bar

Svirvel:
Pakning:
Slange:

Steel - Brass
Viton
Antistatic black synthetic rubber

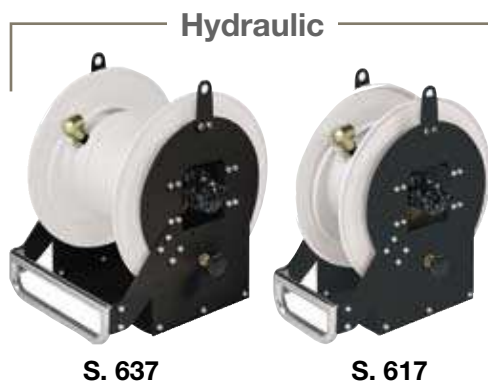

	Dimension	Length (m)	Hose	Flow	Inlet	Outlet	Item
Serie 617 Hydraulic motor operated	Without hose	-	-	300 l/min	F 1.½" G	F 1.½" G	I617/600
	¾"	15	rubber	100 l/min	F 1.½" G	M ¾" G	I617/601
	¾"	20	rubber	95 l/min	F 1.½" G	M ¾" G	I617/602
	¾"	30	rubber	90 l/min	F 1.½" G	M ¾" G	I617/603
	1"	15	rubber	125 l/min	F 1.½" G	M 1" G	I617/604
	1"	20	rubber	120 l/min	F 1.½" G	M 1" G	I617/605
	1.¼"	15	rubber	200 l/min	F 1.½" G	M 1.½" G	I617/606
	1.½"	10	rubber	250 l/min	F 1.½" G	M 1.½" G	I617/607

	Dimension	Length (m)	Hose	Flow	Inlet	Outlet	Item
Serie 637 Hydraulic motor operated	Without hose	-	-	300 l/min	F 1.½" G	F 1.½" G	I637/600
	¾"	40	rubber	87 l/min	F 1.½" G	M ¾" G	I637/601
	¾"	50	rubber	85 l/min	F 1.½" G	M ¾" G	I637/602
	¾"	60	rubber	82 l/min	F 1.½" G	M ¾" G	I637/603
	1"	30	rubber	115 l/min	F 1.½" G	M 1" G	I637/604
	1"	40	rubber	110 l/min	F 1.½" G	M 1" G	I637/605
	1.¼"	20	rubber	185 l/min	F 1.½" G	M 1.¼" G	I637/606
	1.¼"	25	rubber	175 l/min	F 1.½" G	M 1.¼" G	I637/607
	1.¼"	30	rubber	165 l/min	F 1.½" G	M 1.¼" G	I637/608
	1.½"	15	rubber	230 l/min	F 1.½" G	M 1.½" G	I637/609
	1.½"	20	rubber	220 l/min	F 1.½" G	M 1.½" G	I637/610

	Dimension	Length (m)	Hose	Flow	Inlet	Outlet	Item
Serie 618 Air motor operated	Without hose	-	-	140 l/min	F 1" G	F 1" G	I618/100
	¾"	15	rubber	100 l/min	F 1" G	M ¾" G	I618/601
	¾"	20	rubber	95 l/min	F 1" G	M ¾" G	I618/602
	¾"	30	rubber	90 l/min	F 1" G	M ¾" G	I618/603
	1"	15	rubber	115 l/min	F 1" G	M 1" G	I618/604
	1"	20	rubber	110 l/min	F 1" G	M 1" G	I618/605

	Dimension	Length (m)	Hose	Flow	Inlet	Outlet	Item
Serie 638 Air motor operated	Without hose	-	-	140 l/min	F 1" G	F 1" G	I638/100
	¾"	40	rubber	87 l/min	F 1" G	M ¾" G	I638/601
	¾"	50	rubber	85 l/min	F 1" G	M ¾" G	I638/602
	¾"	60	rubber	82 l/min	F 1" G	M ¾" G	I638/603
	1"	30	rubber	105 l/min	F 1" G	M 1" G	I638/604
	1"	40	rubber	100 l/min	F 1" G	M 1" G	I638/605