
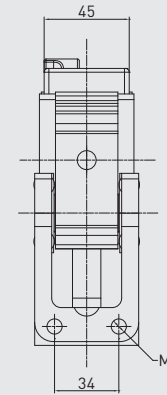


* DIMENSIONAL TOLERANCE FOR DOWEL HOLES: ± 0.02
 DIMENSIONAL TOLERANCE FOR THREADED HOLES: ± 0.1
 REV. 00 - 31/03/2015


WEIGHT

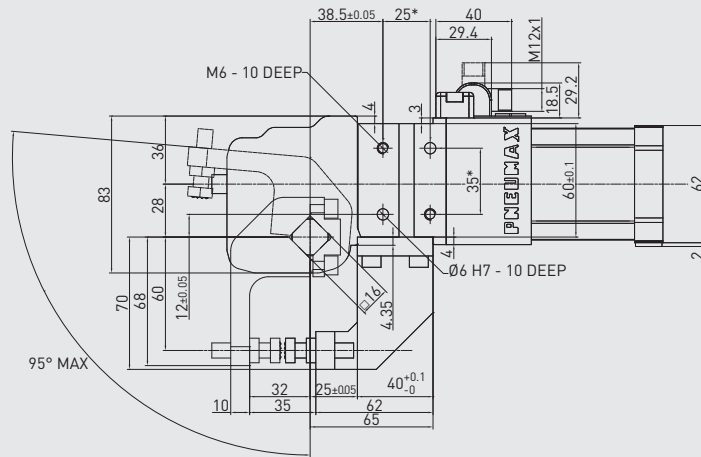

JKP40E

Gripper clamp-workpiece
thickness compensation

Size 40 mm

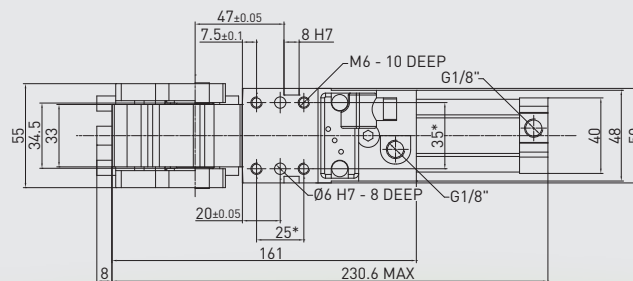

Technical features

Manual release button to open the linkage when air pressure is removed during setup.
 Pneumatic **ports on both sides** of the cylinder.

Operating features

Operating pressure from 2 to 8 bar

Lubrication all the devices are lubricated for life at the factory. Inline air lubrication isn't required

Subject to change
without notice

